

TowCam Battery Charging Cribsheet


D. Fornari

Feb. 8, 2006

- 1) Locate the chargers- **MAKE SURE THEY ARE NOT PLUGGED INTO AC POWER YET**
- 2) **TAKE THE VALVE CAP OFF OF THE BATTERY- IMPORTANT**
- 3) Plug the charger connector into the battery connectors – they are keyed so they only go in one way
- 4) Now, Plug the chargers into AC power – the little LED lights will go on, on the right side of the charger, yellow/red lights... as the charge completes the 80% light will go on, and after 3-4 hours the green ‘Ready’ light will light up – **THE BATTERY IS NOW CHARGED**
- 5) Leave the vent caps OFF, put in a plastic bag and put inside one of the battery wells, that way the battery can vent.



TAKE THE VALVE CAP OFF THE BATTERY

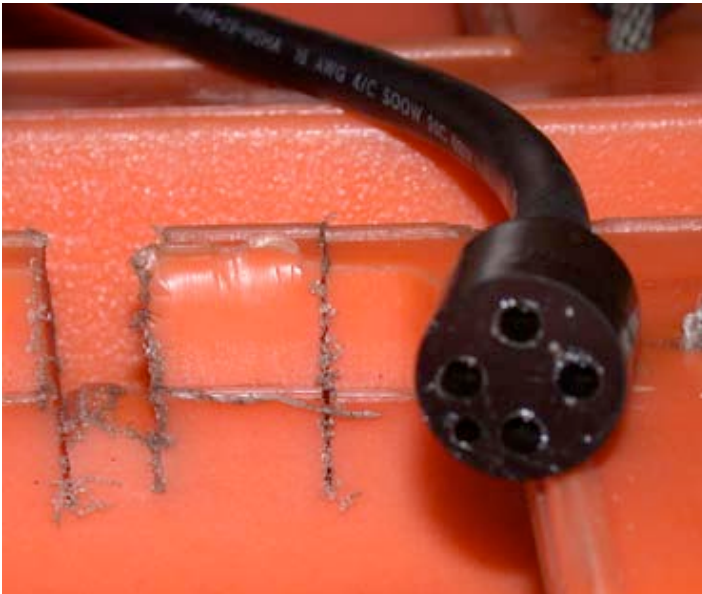

MATE THE MALE AND FEMALE CONNECTORS- THEY ARE KEYED



When
‘READY’ Green
light is ON the
battery is charged

Battery charger – MAKE SURE TO PLUG THE CHARGING CABLE TO THE BATTERY CONNECTOR **BEFORE PLUGGING THE CHARGER INTO AC POWER**